


# PD702 User Guide

## Quick Reference

### Radio Guide for

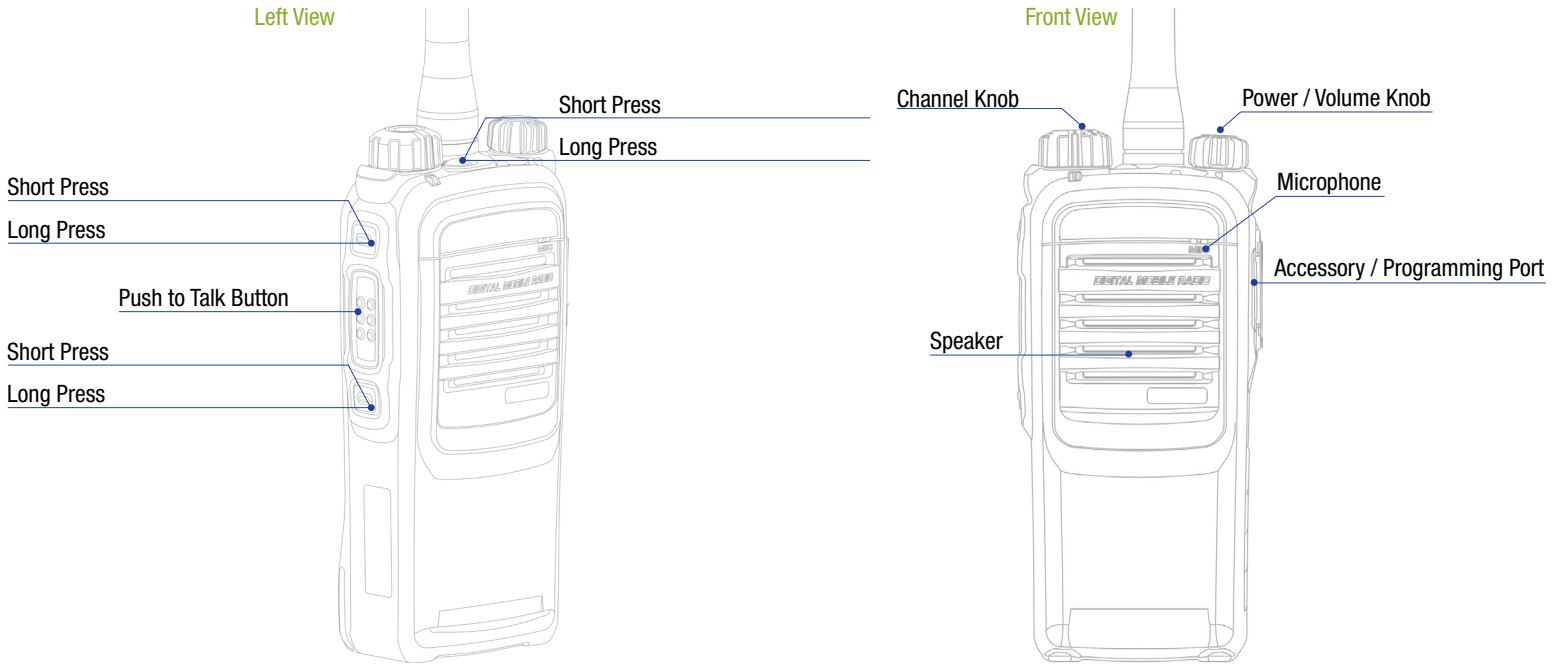

### Radio Operation

#### Charging the Radio

- Please ensure the radio is off when charging
- Charging while the radio is on shortens the lifespan of your battery
- Full charge may take up to 3 hours
- The radio should be placed in the charger with the battery (front of radio) facing the front of the charger.

#### Transmitting Voice Calls

- To initiate a transmission hold the Push to Talk (PTT) Button
- Once you press the PTT Button, the radio will emit a talk permit chirp
- This talk permit chirp signals that you can begin to speak
- When done speaking release the PTT Button
- For a set period of time the system resources are held to allow immediate responses
- If there is no response within this period the system will be released signaled by a call ended chirp

#### Turning the Radio On

- Rotate the on / off volume knob to power on & set the volume
- If the radio is tuned to a non-programmed channel it will emit a continuous error tone
- Please reference the zone / channel list to select the appropriate channel

#### Receiving Voice Calls

- Portables automatically receive transmissions on the Talkgroup

#### Channel Controls

- There are        zones
- Each zone has        channels programmed
- To switch zones
- To switch channels Turn the Channel Knob

# Custom Programming

## Zone

Channel	Name	Channel	Name

## Zone

Channel	Name	Channel	Name

## Zone

Channel	Name	Channel	Name

## Zone

Channel	Name	Channel	Name

## Zone

Channel	Name	Channel	Name

## Zone

Channel	Name	Channel	Name

## Zone

Channel	Name	Channel	Name

## Zone

Channel	Name	Channel	Name

For additional support please contact your local dealer.

Your Local Dealer